



# PL Solutions Photoluminescent EXIT Signs

2 Fc (22 lux) – 120 Minute Rated  
Charged By Any Form Of Light



## Technical Information

Sizes available:

EXIT- No Arrow Framing System  
(17 x 10in x 0.75in) (43.8cm x 25.4cm x 1.9cm)

*EXIT without arrow is used over doors*

EXIT with Arrow Framing System  
(17.24in x 10in x 0.75in)(43.8cm x 25.4cm x 1.9cm)

*EXIT with arrow is used to show the direction of egress*

- Background: Photoluminescent—Yellow
- Tint Lettering/Image: Screen Printed Image
- Flat Illumination: High Visibility Green
- Visibility: 15.25 meters (50 feet) for a minimum of **120 minutes**
- Durability: Explosion-proof for areas requiring explosion-proof exit signage

Green or Red Available



## Features

- Zero energy consumption—zero cost, green design Zero maintenance—no bulbs, no battery replacement Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting.
- Can be used for both high-level and low-level applications.
- Easily movable if egress path changes
- Thin, low profile construction.
- Consistent, uniform illumination 50 ft.

## Tests Passed:

- CAN ULC S-572—UL924 – UL1994  
*Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems*
- Meets ISO 7010 Pictogram *"Graphical symbols - Safety Signs in Workplaces and Public Areas"*
- Rated for 120 Minute Listing for LED, Fluorescent, Metal Halide, Mercury Vapor Charging Sources
- Meets NFPA Life Safety Code 101 / OSHA Requirements
- Meets International & Fire Codes 2009/2012/2015


## GUARANTEE: 25+ years

## Power Requirements

- No backup electrical support required – UL924

**Installation:** Surface, flag, ceiling or stem mounted. Before installation it must be determined that there is a minimum of 2Fc (22 lux) of light on face(s) of the sign at all times during building occupancy.

## Photoluminescent Background

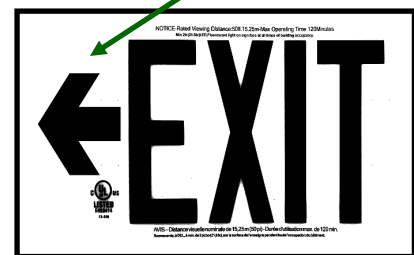

## Anodized Frame and All Purpose Canopy Free With Every Sign

Image				
Silver Canopy Aluminum Frame	EXIT-NA	EXIT-RA	EXIT-LA	EXIT-DB
Description	Single Sided	Right Facing, Single Sided	Left Facing, Single Sided	Double Sided

**"Wall and Ceiling Mount Options On All Signs"**

PL Solutions Inc.

[www.globalplsolutions.com](http://www.globalplsolutions.com)

337 Beach Blvd. Unit 53, Hamilton, Ontario, L8H 6W4 Phone: 416-540-4944